



TENWOLDE

Electrical / Hydraulic single drum lifting winch

TTR Code no. : 15.040

Specifications :

Make : Alimak AB / Sweden
Model : HPG 3000
Built : 1975
Serial no : 208

Drum size :

Drum diameter : 805 mm
Drum length : 800 mm
Flange diameter : 1205 mm

Wire Capacity : 580 mtr. steel wire Ø 27 mm (7 layers)
213 mtr. steel wire Ø 27 mm (3 layers for personnel transport)

<u>Capacity – 200 bar :</u>	Linepull	Linespeed	Displ. Motor	Layer
	8,00 tn	4- 18 m/min	Full	1 st
	5,75 tn	5- 22 m/min	Full	Full drum
	4,00 tn	9- 37 m/min	Half	1 st
	2,90 tn	11- 44 m/min	Half	Full drum


Drive :

Hydraulic motor : Haggglunds 2 speed radial piston type D6170L 00C0 X100
No : 61202839
Displacement : 11,08 ltr/rev
Max. Speed : 0 – 16 rev/min
Working Pressure : 200 bar
Max. Press : 210 bar
Torque : 17,60 daNm/ bar
Gear ratio : 1



Dimensions :

Dimensions o.a. : 2000 x 1400 x 1370 mm (L x W x H=)
Dimensions found : L x W = appr. 2000 x 1400 mm
Weight : approx. 2650 kg (excl. steel wire)

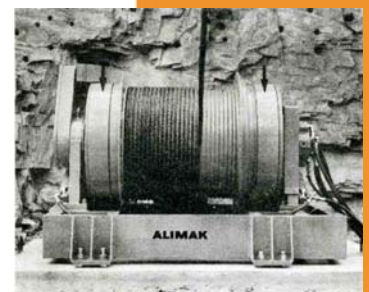

General :

2 no. hydraulic activated band brakes on drum having a breaking torque of 53.000 Nm each brake full drum. Drum grooved for 27 mm steel wire.

Tenwolde Transport en Repair B.V.
P.O. Box 5023
3274 ZJ Heinenoord
Boonsweg 19
3274 LH Heinenoord
The Netherlands
T +31-(0) 186-603333
F +31-(0) 186-603619
E info@tenwolde.com

No details guaranteed, but believed correct.

www.tenwolde.com

